



标记(mark)	修改内容(revised contents)	签名(signature)	日期(Date)
<1>			



### Front view

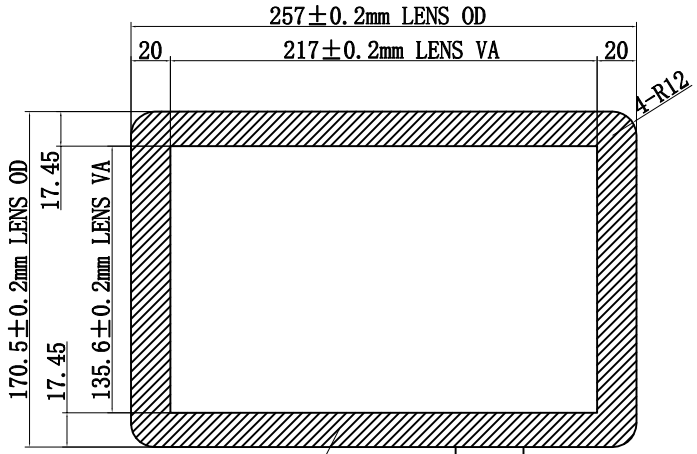

### Side view

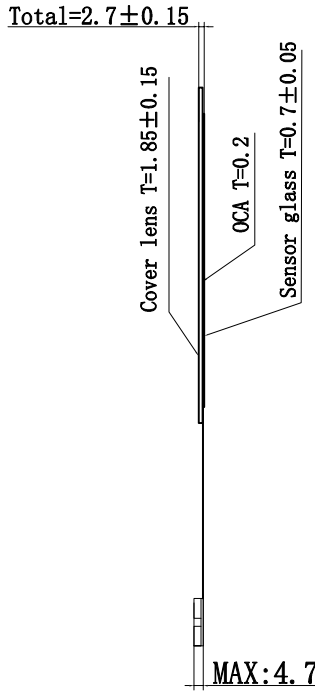

### Back view

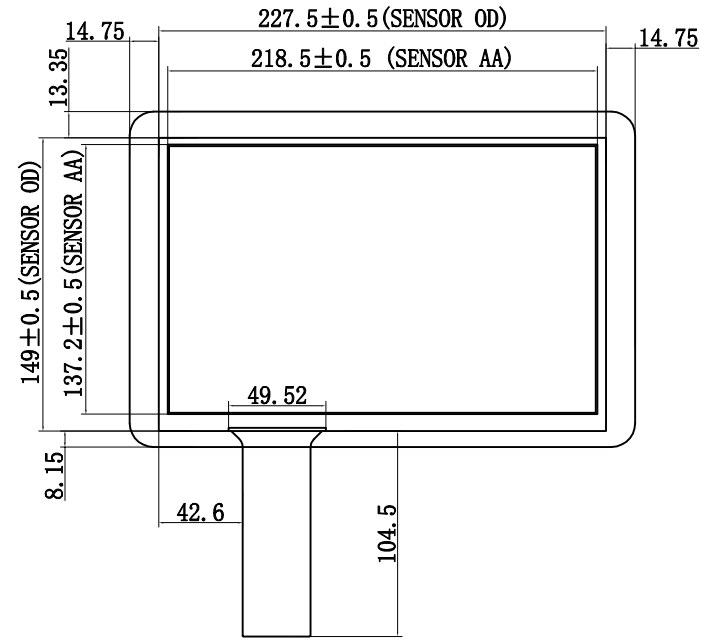

- Technical Parameters
- 0: Interface :USB, ILI2511
  - 1: Touch point: 10
  - 2: Cover lens + Sensor glass + OCA + FPC
  - 3: Cover lens Thickness = 1.85mm
  - 4: Sensor glass Thickness = 0.7mm
  - 5: OCA Thickness = 0.2mm
  - 6: Total Thickness = 2.7mm
  - 7: Sensor Process: Print Process (ITO Pattern) + laser line(Ag)
  - 8: Input Voltage 3.5V~5.5V, Typical 5V
  - 9: Transmittance:>85%
  - 10: Surface Hardness:>6H
  - 11: Relative Humidity:95% at 60°C, RH Non-condensing
  - 12: Operating Conditions:-10 to 70 °C
  - 13: Storage Conditions:-20 to 70 °C
  - 14: Dimension tolerance:±0.3mm

东莞市越丰光电有限公司 Dongguan Yuefeng Photoelectric Co., Ltd				
TITLE: 产品编号	YFDR0101135-1.0			
Designed By: 设计	Customerid: 客户编号	View: 投影方式		
Checked By: 审核	Unit: 单位	mm		
Approved By: 批准	Date: 日期	20220510	Scale: 比例	1:1

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

E F G