
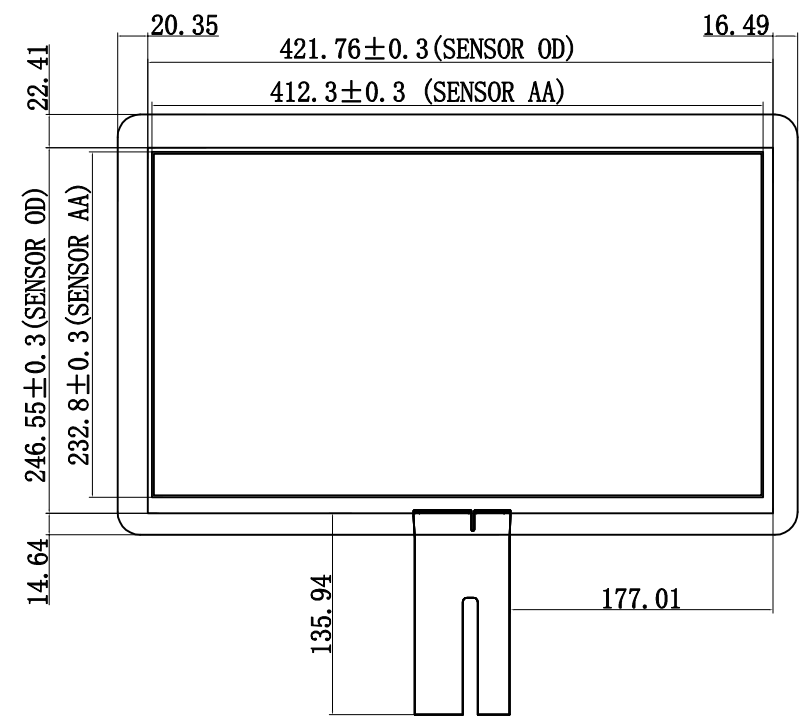
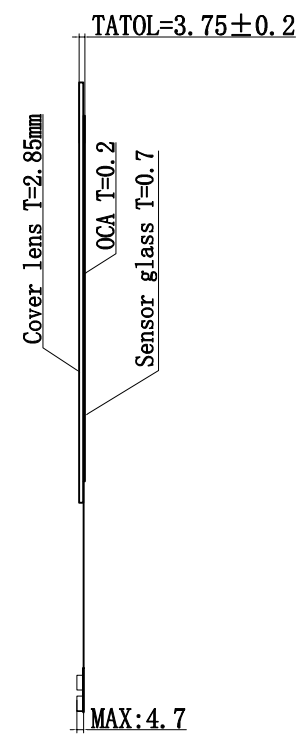


| 标记(mark) | 修改内容(revised contents) | 签名(signature) | 日期(Date) |
|----------|------------------------|---------------|----------|
| <1> | | | |
| <2> | | | |

Front view

Side view

Back view

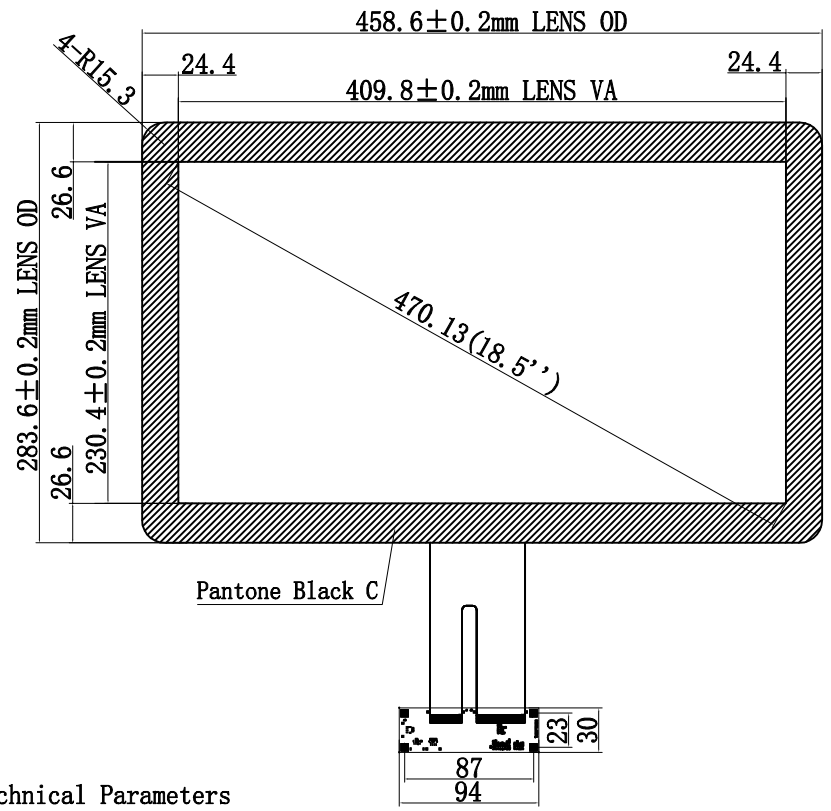

- Technical Parameters**
- 0: Interface :USB, ILI2510
 - 1: Touch point: 10
 - 2: Cover lens + Sensor glass + OCA + FPC
 - 3: Cover lens Thickness = 3 mm
 - 4: Sensor glass Thickness = 0.7mm
 - 5: OCA Thickness = 0.2mm
 - 6: Total Thickness = 3.75mm
 - 7: Sensor Process: Print Process (ITO Pattern) + laser line(Ag)
 - 8: Input Voltage 3.5V~5.5V, Typical 5V
 - 9: Transmittance:>85%
 - 10: Surface Hardness:>6H
 - 11: Relative Humidity:95% at 60°C, RH Non-condensing
 - 12: Operating Conditions:-10 to 70 °C
 - 13: Storage Conditions:-20 to 70 °C
 - 14: Dimension tolerance:±0.3mm

| | | | | |
|--|---------------------|----------|---------------|-----|
| 东莞市越丰光电有限公司 Dongguan Yuefeng Photoelectric Co., Ltd | | | | |
| TITLE: 产品编号 | YFDR0185093 | | | |
| Designed By: 设计 | Customerid: 客户编号 | | View: 投影方式 | |
| Checked By: 审核 | Unit: 单位 | mm | Scale: 比例 | 1:1 |
| Approved By: 批准 | Date: 日期 | 20191212 | | |

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作